

FITTING INSTRUCTIONS



STEP 2

Carefully attach each bracket with the screw supplied. DO NOT OVER TIGHTEN The open clip part of the bracket should face up on the bottom of the casement and down at the top. Included in this kit are 4 x Fixing Brackets 4 x Fixing Screws and a Blind. You will require a small Pozidrive screwdriver not supplied

STEP 1 Locate the 4 fixing holes in the in the top and the bottom of the opening casement

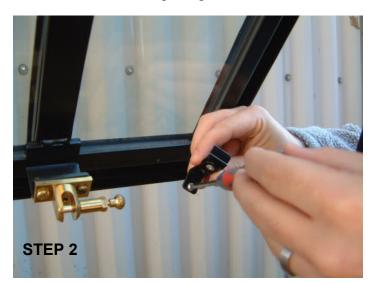

STEP 3

Unwrap the blind and clip the rail with the fabric attached into either the top or bottom brackets. Clip the front of the rail into the bracket and snap down back edge of the rail



STEP 4

Keeping the fabric of the blind in the closed position extend the bottom rail and snap the rail into the clips



Tusacn Foundry Products Unit C1-C2 Oakendene Industrial Estate Bolney Road Cowfold RH13 8AZ 01403 860040, Fax 0845 3450215